

符合RoHS

ERON®

No.E-9402

T-SLOT NUTS

T型螺母

材质 S45C


热处理 淬火HRC30±5

表面处理 发黑处理


●采用螺栓不可贯通的结构，以防因螺栓突出而损坏T型槽。

参见页

T型螺母 (SUS)



P.610 ▶

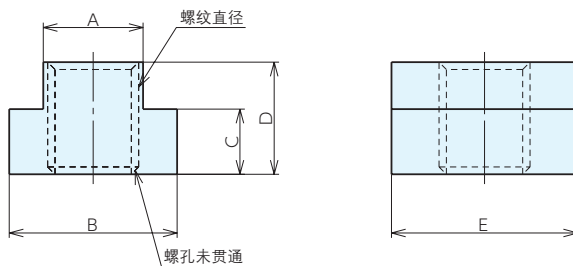

基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引

规格

订单号	型号	适用T型槽宽	螺纹直径 (粗牙)	A±0.3	B	C	D	E	重量g
113056	TNM1006	10	M 6×1.0	9	14.3	6.4	12.7	22	23
901108	TNM1008	10	M 8×1.25	9	14.3	6.4	12.7	22	23
113057	TNM1208	12	M 8×1.25	11.5	17.5	6.4	12.7	22	28
902571	TNM1210	12	M10×1.5	11.5	17.5	6.4	12.7	22	27
902572	TNM1410	14	M10×1.5	13.5	22.2	8.5	15.8	29	55
902581	TNM1412	14	M12×1.75	13.5	22.2	8.5	15.8	29	51
902630	TNM1612	16	M12×1.75	15.3	25.4	8.5	15.8	29	63
902631	TNM1614	16	M14×2	15.3	25.4	8.5	15.8	29	59
113058	TNM1810	18	M10×1.5	17	28.6	11.1	19.1	32	105
915817	TNM1812	18	M12×1.75	17	28.6	11.1	19.1	32	102
902632	TNM1814	18	M14×2	17	28.6	11.1	19.1	32	96
902633	TNM1816	18	M16×2	17	28.6	11.1	19.1	32	89
902634	TNM2016	20	M16×2	19.5	31.8	11.9	19.1	32	108
902635	TNM2018	20	M18×2.5	19.5	31.8	11.9	19.1	32	100
925179	TNM2216	22	M16×2	21.5	36	14.2	25.4	38	193
902636	TNM2218	22	M18×2.5	21.5	36	14.2	25.4	38	182
902637	TNM2220	22	M20×2.5	21.5	36	14.2	25.4	38	171
925551	TNM2416	24	M16×2	23.5	38.2	14.2	25.4	38	214
902638	TNM2418	24	M18×2.5	23.5	38.2	14.2	25.4	38	203
902639	TNM2420	24	M20×2.5	23.5	38.2	14.2	25.4	38	192
902640	TNM2620	26	M20×2.5	24.9	41.3	15.8	25.4	45	263
902641	TNM2622	26	M22×2.5	24.9	41.3	15.8	25.4	45	250
932558	TNM2816	28	M16×2	26.5	41.3	17.5	28.6	51	378
939331	TNM2820	28	M20×2.5	26.5	41.3	17.5	28.6	51	353
902642	TNM2822	28	M22×2.5	26.5	41.3	17.5	28.6	51	338
902643	TNM2824	28	M24×3	26.5	41.3	17.5	28.6	51	326
903330	TNM3224	32	M24×3	31.3	47.6	19.1	31.8	54	450
903331	TNM3227	32	M27×3	31.3	47.6	19.1	31.8	54	420
903332	TNM3630	36	M30×3.5	35.5	50	22.2	44.5	64	750
903333	TNM4236	42	M36×4	40	62	27	52	72	1150