



符合RoHS

尺寸追加

ERON® QPM

No.E-9991

INSERT NOZZLES


插入式喷嘴JB型

材质 本体：乙缩醛 喷嘴及球体：SUS303

最大压力 1MPa

耐热温度 70℃

- 位于锥面的喷嘴可前后左右倾斜35°，精确地喷出切削液。
- 注意：R螺纹上未附配O型环。

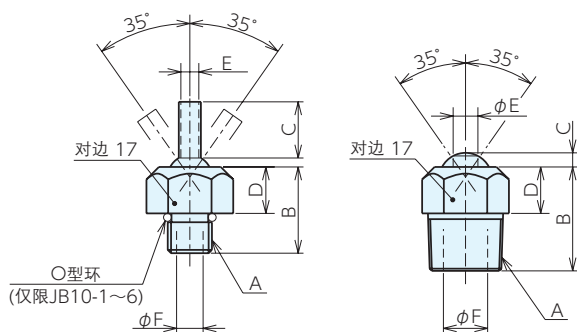

规格

订单号	型号	A	B	C	D	E	F	G	重量g
970084	JB10-1	M10×1.5 (粗牙)	19.6	2	10.4	φ2.8	4.8	17	6
970085	JB10-2	M10×1.5 (粗牙)	19.6	6.4	10.4	φ2.8	4.8	17	6.5
970086	JB10-3	M10×1.5 (粗牙)	19.6	12.7	10.4	φ2.8	4.8	17	7.5
970087	JB10-4	M10×1.5 (粗牙)	19.6	34.6	10.4	φ2.8	4.8	17	9.5
970088	JB10-5	M10×1.5 (粗牙)	19.6	2	10.4	φ4.1	4.8	17	6
970089	JB10-6	M10×1.5 (粗牙)	19.6	12.7	10.4	φ4.1	4.8	17	6.5
990252	JB10-7	M10×1.5 (粗牙)	19.6	2	10.4	M5	4.8	17	6
111439	JB10-8	M10×1.5 (粗牙)	19.6	31.8	10.4	φ4.1	4.8	17	7.2
123167	JB12-1	M10×1.75 (粗牙)	19.6	2	10.4	φ2.8	φ5.6	17	7.5
123168	JB12-2	M10×1.75 (粗牙)	19.6	6.4	10.4	φ2.8	φ4.7	17	7.5
123169	JB12-3	M10×1.75 (粗牙)	19.6	12.7	10.4	φ2.8	φ4.7	17	10
123170	JB12-4	M10×1.75 (粗牙)	19.6	31.8	10.4	φ2.8	φ4.7	17	12.5
123171	JB12-5	M10×1.75 (粗牙)	19.6	2	10.4	φ4.1	φ4.7	17	7.5
123172	JB12-6	M10×1.75 (粗牙)	19.6	12.7	10.4	φ4.1	φ4.7	17	7.5
123173	JB12-7	M10×1.75 (粗牙)	19.6	31.8	10.4	φ4.1	φ4.7	17	10
123174	JB12-8	M10×1.75 (粗牙)	19.6	2	10.4	M5	φ4.7	17	10
123175	JB20-1	M20×1.5 (粗牙)	27.9	19.1	15.2	4.1	φ10	24	27.5
123176	JB20-2	M20×1.5 (粗牙)	27.9	38.1	15.2	4.1	φ10	24	30
123177	JB20-3	M20×1.5 (粗牙)	27.9	19.1	15.2	5.6	φ10	24	27.5
123178	JB20-4	M20×1.5 (粗牙)	27.9	38.1	15.2	5.6	φ10	24	32.5
123179	JB20-5	M20×1.5 (粗牙)	27.9	19.1	15.2	7.1	φ10	24	25
123180	JB20-6	M20×1.5 (粗牙)	27.9	38.1	15.2	7.1	φ10	24	27.5

基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引

订单号	型号	A	B	C	D	E	F	G	重量g
985022	JB1B-1	R1/8	20.3	2.4	10.4	φ2.8	5.6	17	6
985023	JB1B-2	R1/8	20.3	6.4	10.4	φ2.8	5.6	17	7
985024	JB1B-3	R1/8	20.3	12.7	10.4	φ2.8	5.6	17	6
985025	JB1B-4	R1/8	20.3	2.1	10.4	φ4.1	5.6	17	6
985026	JB1B-5	R1/8	20.3	12.7	10.4	φ4.1	5.6	17	7
990253	JB1B-6	R1/8	20.3	2	10.4	M5	5.6	17	6
111440	JB1B-7	R1/8	20.3	31.8	10.4	φ2.8	5.6	17	8.6
111441	JB1B-8	R1/8	20.3	31.8	10.4	φ4.1	5.6	17	6.8
985027	JB2B-1	R1/4	23.4	2.4	11.5	φ2.8	5.6	17	8
985028	JB2B-2	R1/4	23.4	6.4	11.5	φ2.8	5.6	17	8
985029	JB2B-3	R1/4	23.4	12.7	11.5	φ2.8	5.6	17	8
985030	JB2B-4	R1/4	23.4	2.1	11.5	φ4.1	5.6	17	9
985031	JB2B-5	R1/4	23.4	12.7	11.5	φ4.1	5.6	17	7
990254	JB2B-6	R1/4	23.4	2	11.5	M5	5.5	17	8
111442	JB2B-7	R1/4	23.1	31.8	10.4	φ2.8	7.8	17	10.4
111443	JB2B-8	R1/4	23.1	31.8	10.4	φ4.1	7.8	17	8
970090	JB3B-1	R3/8	23.4	2	10.4	φ5.6	7.8	17	10
990255	JB3B-2	R3/8	23.4	12.7	11.5	φ5.6	7.8	17	11
990256	JB3B-3	R3/8	23.4	31.8	11.5	φ5.6	7.8	17	12
990257	JB3B-4	R3/8	23.4	2.4	11.5	M6	7.8	17	10

基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶



平台、测量仪

钻床平口钳

机工虎钳

索引

使用例



喷嘴前端采用螺纹式（E尺寸），可安装喷头或导管。