

符合RoHS

ERON®

No.E-9603


STRAIGHT PINS

圆柱销

材质 SUJ-2

热处理 淬火HRC60

● $\phi 3 \sim \phi 5$ 采取了轻倒角，而 $\phi 6$ 以上则采取了 $C0.3 \sim 0.5$ 的倒角。

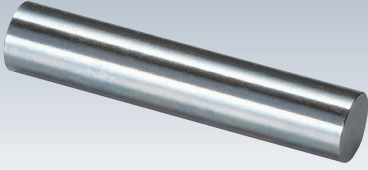


m6尺寸允许偏差表	
3	+0.008 +0.002
4	+0.012 +0.004
5	
6	+0.015 +0.006
8	
10	+0.018 +0.007
12	
16	+0.021 +0.008
18	
20	

规格

订单号	型号(603-A×B)	重量g
904699	603-03020	1.0
904700	603-03030	1.5
904701	603-03040	2.0
904702	603-04020	2.0
904703	603-04030	3.0
904704	603-04040	4.0
904705	603-05020	3.0
904706	603-05030	4.5
904707	603-05040	6.0
904709	603-06020	4.5
904710	603-06030	6.5
904711	603-06040	9.0
904712	603-06050	11.0
904713	603-08020	8.0
904714	603-08030	12.0
904715	603-08040	16.0
904716	603-08050	20.0
904717	603-08070	28.0
904718	603-10020	12.0
904719	603-10030	18.0
904720	603-10040	25.0
904721	603-10050	30.0

订单号	型号(603-A×B)	重量g
904722	603-10070	43.0
904723	603-10100	62.0
904724	603-12030	27.0
904725	603-12040	35.0
904726	603-12050	44.0
904727	603-12070	62.0
904728	603-12100	88.0
904729	603-16030	47.0
904730	603-16040	63.0
904731	603-16050	78.0
904732	603-16070	110.0
904733	603-16100	157.0
904950	603-18030	60.0
904951	603-18040	80.0
904952	603-18050	100.0
904953	603-18070	140.0
904954	603-18100	200.0
904734	603-20040	98.0
904735	603-20050	123.0
904736	603-20070	173.0
904737	603-20100	246.0

使用例



基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引