



符合RoHS

ERON®

No.E-9419

LOCATING CYLINDERS


定位圆筒(定位限位器)

材质 本体: SCM420 菱形螺母: S45C-D

热处理 本体: 淬火HRC56±2

表面处理 菱形螺母: 发黑处理

※(顶面)的加工为
S型: 磨削加工(▽▽▽)
G型: 机械加工(▽)

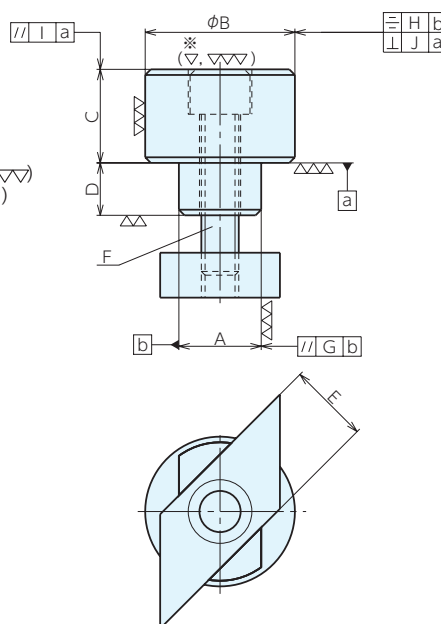

规格

订单号	型号	A	B	C	D	E	F (粗牙)	G	H	I	J	重量g
934442	LS 1015S	10 $^{0}_{-0.011}$	20 $^{±0.01}$	15 $^{±0.01}$	5.3	9.6	M 6×1.0 ×25	0.01	0.01	0.01	0.01	55
934443	LS 1025G	10 $^{0}_{-0.011}$	20 $^{±0.01}$	25 $^{±0.2}$	5.3	9.6	M 6×1.0 ×35	0.01	0.01	-	0.01	80
903380	LS 1215S	12 $^{0}_{-0.011}$	20 $^{±0.01}$	15 $^{±0.01}$	5.3	11.6	M 6×1.0 ×25	0.01	0.01	0.01	0.01	55
903381	LS 1225G	12 $^{0}_{-0.011}$	20 $^{±0.01}$	25 $^{±0.2}$	5.3	11.6	M 6×1.0 ×35	0.01	0.01	-	0.01	80
903382	LS 1425S	14 $^{0}_{-0.011}$	32 $^{±0.01}$	25 $^{±0.01}$	7.6	13.6	M 8×1.25×35	0.01	0.01	0.01	0.01	200
903383	LS 1450G	14 $^{0}_{-0.011}$	32 $^{±0.01}$	50 $^{±0.2}$	7.6	13.6	M 8×1.25×60	0.01	0.01	-	0.01	355
903384	LS 1625S	16 $^{0}_{-0.011}$	32 $^{±0.01}$	25 $^{±0.01}$	10	15.6	M 8×1.25×40	0.01	0.01	0.01	0.01	220
903385	LS 1650G	16 $^{0}_{-0.011}$	32 $^{±0.01}$	50 $^{±0.2}$	10	15.6	M 8×1.25×75	0.01	0.01	-	0.01	375
903386	LS 1825S	18 $^{0}_{-0.011}$	40 $^{±0.01}$	25 $^{±0.01}$	12.3	17.6	M10×1.5 ×40	0.01	0.01	0.01	0.01	360
930256	LS 1835G	18 $^{0}_{-0.011}$	40 $^{±0.01}$	35 $^{±0.2}$	14	17.6	M10×1.5 ×50	0.01	0.01	-	0.01	460
903387	LS 1850G	18 $^{0}_{-0.011}$	40 $^{±0.01}$	50 $^{±0.2}$	12.3	17.6	M10×1.5 ×65	0.01	0.01	-	0.01	600
930257	LS 1875G	18 $^{0}_{-0.011}$	40 $^{±0.01}$	75 $^{±0.2}$	14	17.6	M10×1.5 ×90	0.01	0.01	-	0.01	850
932024	LS 2025S	20 $^{0}_{-0.013}$	40 $^{±0.01}$	25 $^{±0.01}$	14	19.6	M10×1.5 ×45	0.01	0.01	0.01	0.01	380
932025	LS 2050G	20 $^{0}_{-0.013}$	40 $^{±0.01}$	50 $^{±0.2}$	14	19.6	M10×1.5 ×70	0.01	0.01	-	0.01	630
932026	LS 2075G	20 $^{0}_{-0.013}$	40 $^{±0.01}$	75 $^{±0.2}$	14	19.6	M10×1.5 ×95	0.01	0.01	-	0.01	870
903388	LS 2225S	22 $^{0}_{-0.013}$	40 $^{±0.01}$	25 $^{±0.01}$	14	21.6	M10×1.5 ×50	0.01	0.01	0.01	0.01	410
903389	LS 2250G	22 $^{0}_{-0.013}$	40 $^{±0.01}$	50 $^{±0.2}$	14	21.6	M10×1.5 ×75	0.01	0.01	-	0.01	650
930258	LS 2275G	22 $^{0}_{-0.013}$	60 $^{±0.01}$	75 $^{±0.2}$	18	21.6	M12×1.75×95	0.01	0.01	-	0.01	1760
930259	LS22100G	22 $^{0}_{-0.013}$	60 $^{±0.01}$	100 $^{±0.2}$	18	21.6	M12×1.75×120	0.01	0.01	-	0.01	2310
930260	LS22125G	22 $^{0}_{-0.013}$	60 $^{±0.01}$	125 $^{±0.2}$	18	21.6	M12×1.75×145	0.01	0.01	-	0.01	2860

使用例

