

符合RoHS

ERON® AMF®

No.E-9465

T-SLOT BOLTS


T型螺栓(高张力)

材质 SCM435(锻件)

热处理 淬火HRC30±5

表面处理 发黑处理

强度等级 12.9

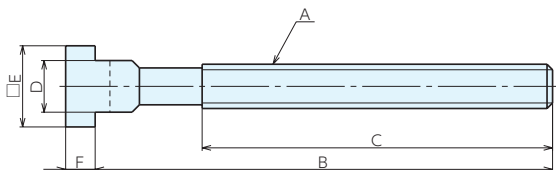

规格

订单号	型号	适用T型槽宽	A (粗牙)	B	C	D	E	F	重量g
916021	BTH1250	12	M12×1.75	50	35	11.7	18	7	60
916022	BTH1280	12	M12×1.75	80	55	11.7	18	7	75
916023	BTH1212	12	M12×1.75	125	75	11.7	18	7	110
972913	BTH1216	12	M12×1.75	160	100	11.7	18	7	135
916024	BTH1220	12	M12×1.75	200	120	11.7	18	7	160
916025	BTH1450	14	M12×1.75	50	35	13.7	22	8	70
916026	BTH1480	14	M12×1.75	80	55	13.7	22	8	100
916027	BTH1412	14	M12×1.75	125	75	13.7	22	8	120
972914	BTH1416	14	M12×1.75	160	100	13.7	22	8	150
916028	BTH1420	14	M12×1.75	200	120	13.7	22	8	180
916029	BTH1663	16	M16×2	63	45	15.7	25	9	140
972915	BTH1680	16	M16×2	80	55	15.7	25	9	160
916030	BTH1610	16	M16×2	100	65	15.7	25	9	180
972916	BTH1612	16	M16×2	125	85	15.7	25	9	225
916031	BTH1616	16	M16×2	160	100	15.7	25	9	260
972917	BTH1620	16	M16×2	200	125	15.7	25	9	315
916032	BTH1625	16	M16×2	250	150	15.7	25	9	380
916033	BTH1863	18	M16×2	63	45	17.7	28	10	160
916034	BTH1810	18	M16×2	100	65	17.7	28	10	203
916035	BTH1816	18	M16×2	160	100	17.7	28	10	280
972918	BTH1820	18	M16×2	200	125	17.7	28	10	330
916036	BTH1825	18	M16×2	250	150	17.7	28	10	430
916037	BTH2080	20	M20×2.5	80	55	19.7	32	12	290
916038	BTH2012	20	M20×2.5	125	85	19.7	32	12	390
916039	BTH2020	20	M20×2.5	200	125	19.7	32	12	550
916040	BTH2031	20	M20×2.5	315	190	19.7	32	12	800
916041	BTH2280	22	M20×2.5	80	55	21.7	35	14	330
916042	BTH2212	22	M20×2.5	125	85	21.7	35	14	428
916043	BTH2220	22	M20×2.5	200	125	21.7	35	14	570
916044	BTH2231	22	M20×2.5	315	190	21.7	35	14	820
916045	BTH2410	24	M24×3	100	70	23.7	40	16	540
916046	BTH2416	24	M24×3	160	110	23.7	40	16	770
916047	BTH2425	24	M24×3	250	150	23.7	40	16	1040
916048	BTH2440	24	M24×3	400	240	23.7	40	16	1410

基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引