



符合RoHS



No.E-9406


TAPPED END CLAMP STRAPS

带螺栓调节压板

材 质 S45C

热处理 淬火HRC30±5

表面处理 发黑处理


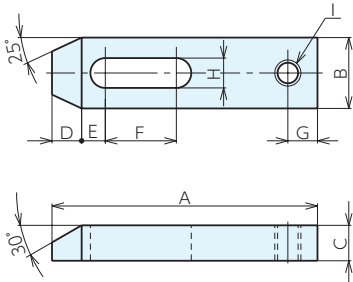


规格

| 订单号    | 型号      | 适用螺栓 | A   | B  | C  | D  | E  | F  | G  | H  | I (粗牙)   | 重量kg |
|--------|---------|------|-----|----|----|----|----|----|----|----|----------|------|
| 926819 | SCM0011 | M 8  | 40  | 25 | 12 | -  | 12 | 8  | 7  | 9  | M 8×1.25 | 0.08 |
| 926820 | SCM0012 | M 8  | 80  | 25 | 12 | -  | 12 | 20 | 7  | 9  | M 8×1.25 | 0.16 |
| 926821 | SCM0031 | M12  | 54  | 25 | 12 | 8  | 10 | 8  | 10 | 13 | M12×1.75 | 0.13 |
| 926822 | SCM0032 | M12  | 108 | 32 | 16 | 8  | 12 | 25 | 10 | 13 | M12×1.75 | 0.36 |
| 926823 | SCM0100 | M14  | 58  | 32 | 16 | 8  | 12 | 8  | 12 | 16 | M14×2    | 0.18 |
| 901114 | SCM0101 | M14  | 100 | 38 | 19 | 16 | 12 | 23 | 16 | 16 | M14×2    | 0.44 |
| 902691 | SCM0102 | M14  | 150 | 38 | 19 | 16 | 12 | 39 | 16 | 16 | M14×2    | 0.70 |
| 926824 | SCM0200 | M16  | 65  | 50 | 25 | 8  | 14 | 8  | 14 | 18 | M16×2    | 0.48 |
| 902692 | SCM0201 | M16  | 100 | 50 | 25 | 22 | 14 | 23 | 19 | 18 | M16×2    | 0.67 |
| 902693 | SCM0202 | M16  | 150 | 50 | 25 | 22 | 14 | 32 | 19 | 18 | M16×2    | 1.10 |
| 902694 | SCM0203 | M16  | 175 | 50 | 25 | 22 | 14 | 39 | 19 | 18 | M16×2    | 1.30 |
| 902695 | SCM0301 | M18  | 150 | 50 | 30 | 24 | 15 | 26 | 22 | 20 | M18×2.5  | 1.30 |
| 902696 | SCM0302 | M18  | 175 | 50 | 30 | 24 | 15 | 32 | 22 | 20 | M18×2.5  | 1.55 |
| 902697 | SCM0303 | M18  | 200 | 50 | 30 | 24 | 15 | 39 | 22 | 20 | M18×2.5  | 1.88 |

※ 螺栓为另售品。

使用例

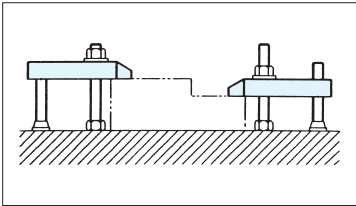

参见页

带旋转底垫支撑螺丝



P.507 ▶

无头螺钉



P.570 ▶

基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引